

HEAVY LIFTING REDEFINED

Introducing the new G-2160, from the manufacturer
that brought you the original wide body shackle

SAVE ON SLING COST

Widest bow on the
market, allows higher
efficiency of sling and
smaller sling size

SAVE TIME

Enhanced handling with
three lift points: center rib
bow and both sides of pin
[1,2,3]

Removeable recessed
lift point reduces snags and
simplifies assembly

Permanent raised markings
for easy field identification

Bow-to-bow assembly
compatible for all sizes,
unlike other brands

Easy-Loc™ available for
400t, 500t, and 600t

Anti-rotation bolt head
prevents turning during
installation



IMPROVE SAFETY

100% comprehensive
production testing

- ultrasonic inspection
- magnetic particle inspection
- chemical analysis
- mechanical material testing
- visual inspection


Proof load tested up to
2x WLL

Design factor 5:1

Type approved and
DNV certified, which validates
quality, safety, and performance
characteristics

Permanent raised markings

Unmatched transparency

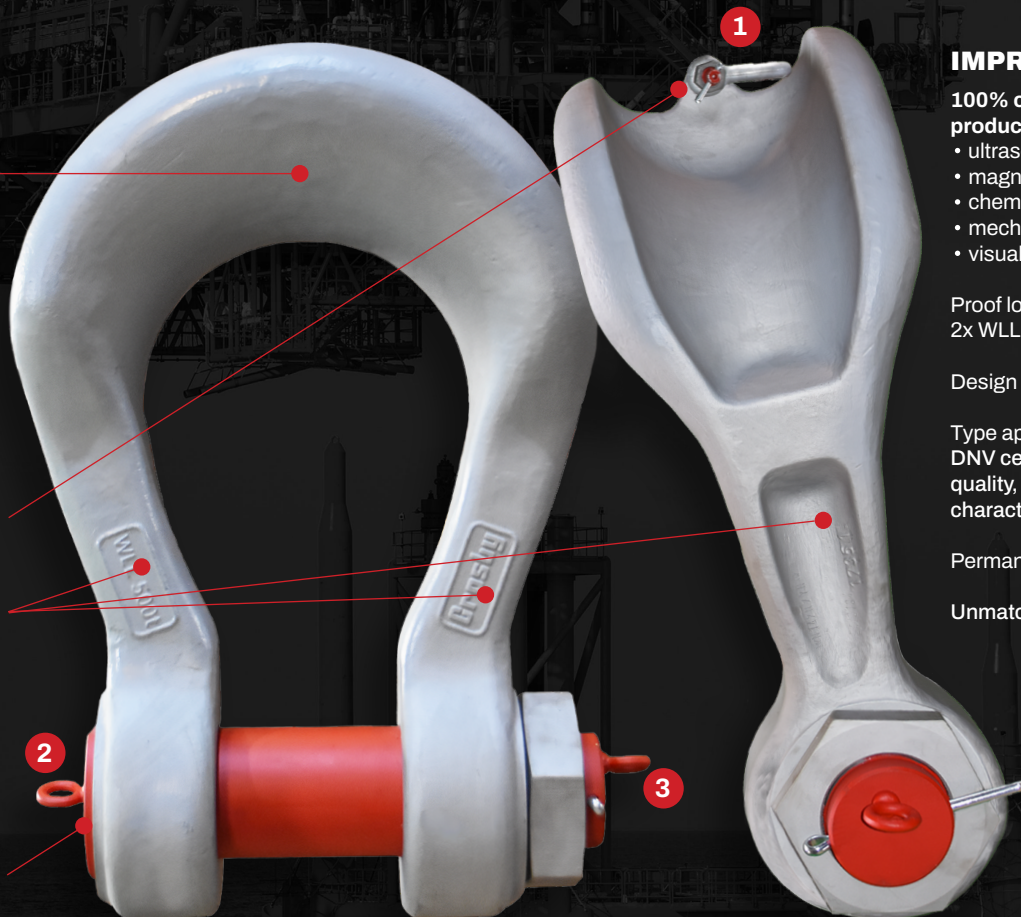

Engineered to the highest standards.
New design available from 400t to 2000t.


Crosby®

 KITO CROSBY™

kitocrosby.com/widebody



The most ergonomic design, for industry-leading safety and efficiency

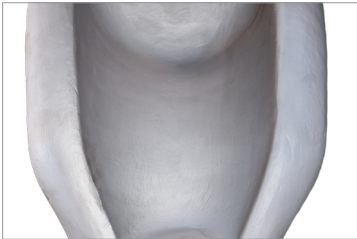

Widest load surface area

The widest bow on the market, allows higher efficiency of sling and smaller sling size.




Bow-to-bow for all sizes

The only shackle brand that offers bow-to-bow compatibility for all sizes in the product line.



Anti-rotation bolt head

Allows for easier, safer, and faster installation.

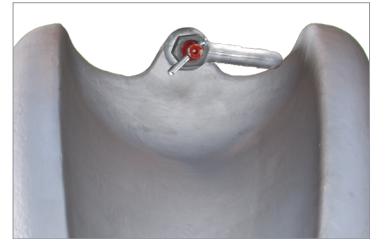

Lifting points without snags

Recessed and removable lifting point reduces snags, simplifies assembly, and is centered for balanced handling.

Bolt securement made easy with Easy-Loc™

The patented Crosby Easy-Loc bolt securement system reduces install/release times by up to 90%.



1

Open collar



2

Push collar onto bolt





3

Close collar

Available as an option for G-2160 sizes 75t – 600t (400t, 500t, and 600t in the new shackle design).
Watch demo video at kitocrosby.com/widebody.


The only wide body shackle with seamless Crosby Straightpoint integration

The only wide body shackle shipped from factory ready to accept a Crosby SP load pin for load monitoring and improved safety.

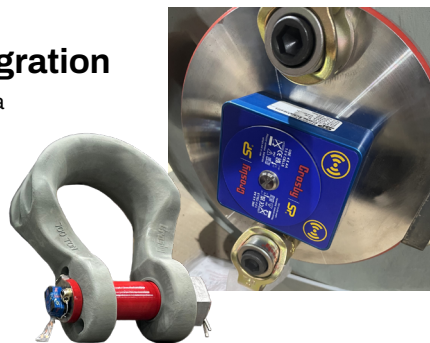

Crosby®

New design available in eight capacities 400t – 2000t

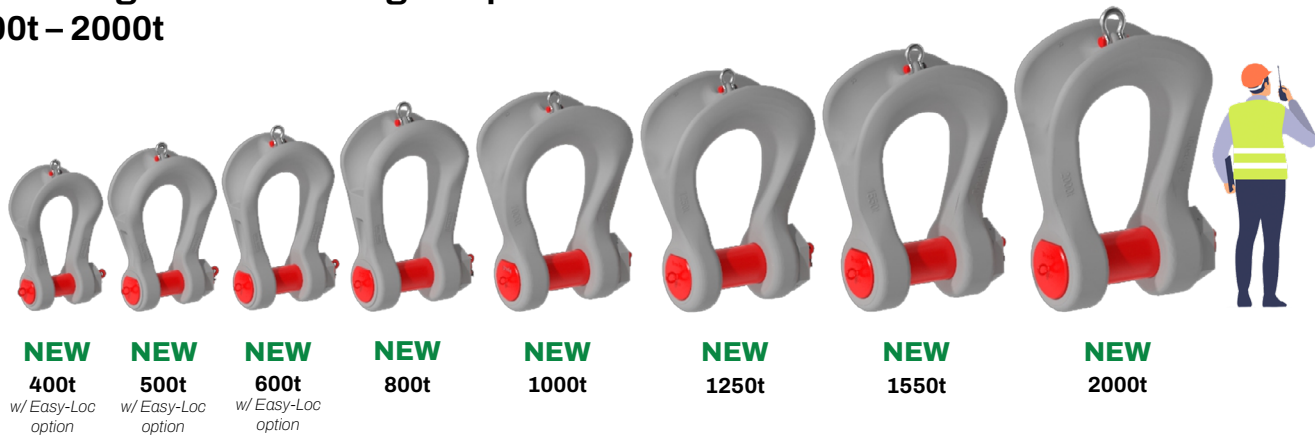

G-2160 Wide Body Shackles (Metric)

	Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)																Effective Body Diameter	Replacement Bolt Stock No. G-4709
				A	B	C	D	E	F	G	H	J	K	L	M	N	P	R			
NEW	7	1021256	1.8	32	22	90	41	64	46	104	149	32	32	—	105	—	24	18	53	—	
	12 1/2	1021265	3.96	43	29	118	54	83	61	140	194	35	41	—	137	—	32	23	61	—	
	18	1021274	6.71	52	35	148	64	102	68	172	238	38	51	—	170	—	36	30	71	1083349	
	30	1021276	11.93	70	41	176	80	127	89	216	289	64	64	—	206	—	45	35	104	3711377	
	40	1021278	21.23	86	51	205	95	152	102	270	346	44	76	—	259	—	59	43	91	3711392	
	55	1021287	30.6	83	57	238	114	178	118	311	397	51	89	—	263	—	67	51	109	1083375	
	75	1022101	50.4	105	70	293	127	185	136	321	474	95	93	102	382	46	70	61	160	1083400	
	125	1022110	86.9	130	80	365	150	220	165	393	584	95	110	102	465	46	89	79	173	1089533	
	200	1022118	189	150	105	480	217	275	214	515	773	133	138	102	491	46	126	86	241	1089542	
	300	1022127	363	187	133	600	264	321	267	608	957	156	160	102	574	46	147	109	290	1089551	
	400	1021336	535	220	160	620	360	375	314	668	1062	183	188	—	780	—	205	150	363	1511032	
	500	1021345	796	250	180	685	435	455	340	792	1190	222	228	—	863	—	245	164	439	1511033	
	600	1021354	1003	275	200	740	475	489	375	816	1292	243	263	—	938	—	265	182	480	1511034	
	800	1021363	1535	342	230	820	536	554	440	904	1462	272	300	—	1078	—	307	212	540	1511037	
	1000	1021381	2262	404	270	850	610	640	500	1116	1584	338	320	—	1187	—	349	233	643	1511021	
1250	1021390	3085	442	300	928	675	708	570	1259	1749	371	354	—	1322	—	386	249	709	1511027		
1550	1021399	3802	470	320	1010	720	755	615	1314	1891	397	378	—	1427	—	413	290	757	1511028		
2000	1021408	5383	520	385	1140	770	810	680	1412	2120	431	405	—	1597	—	447	323	816	1511029		

G-2160 Wide Body Shackles (Imperial)

	Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)																Effective Body Diameter	Replacement Bolt Stock No. G-4709
				A	B	C	D	E	F	G	H	J	K	L	M	N	P	R			
NEW NEW NEW NEW NEW NEW NEW NEW	7	1021256	4.0	1.25	.88	3.56	1.60	2.5	1.82	4.10	5.87	1.25	1.25	—	4.14	—	.96	.69	2.1	—	
	12 1/2	1021265	8.8	1.69	1.13	4.63	2.13	3.26	2.38	5.51	7.63	1.37	1.63	—	5.38	—	1.25	.92	2.4	—	
	18	1021274	14.9	2.03	1.38	5.81	2.50	4.00	2.69	6.76	9.38	1.50	2.00	—	6.69	—	1.41	1.16	2.8	1083349	
	30	1021276	26.3	2.74	1.63	6.94	3.13	5.00	3.50	8.50	11.38	2.50	2.50	—	8.10	—	1.75	1.38	4.1	3711377	
	40	1021278	46.8	3.38	2.00	8.06	3.75	6.00	4.00	10.62	13.62	1.75	3.00	—	10.18	—	2.31	1.69	3.6	3711392	
	55	1021287	68.0	3.25	2.25	9.36	4.50	7.00	4.63	12.26	15.63	2.00	3.50	—	10.36	—	2.63	2.00	4.3	1083375	
	75	1022101	112	4.13	2.75	11.53	5.00	7.28	5.34	12.64	18.66	3.75	3.64	4	15.04	1.8	2.75	2.39	6.3	1083400	
	125	1022110	193	5.12	3.15	14.37	5.91	8.66	6.50	15.47	23.00	3.75	4.33	4	18.32	1.8	3.50	3.10	6.8	1089533	
	200	1022118	420	5.91	4.12	18.91	8.56	10.84	8.41	20.27	30.44	5.25	5.42	4	19.35	1.8	4.94	3.39	9.5	1089542	
	300	1022127	805	7.38	5.25	23.63	10.38	12.62	10.5	23.93	37.66	6.13	6.31	4	22.61	1.8	5.78	4.30	11.4	1089551	
	400	1021336	1180	8.66	6.30	24.41	14.17	14.76	12.36	26.30	41.81	7.20	7.38	—	30.71	—	8.07	5.91	14.3	1511032	
	500	1021345	1754	9.84	7.09	26.97	17.13	17.90	13.39	31.19	46.85	8.74	8.96	—	33.98	—	9.65	6.46	17.3	1511033	
	600	1021354	2210	10.83	7.87	29.13	18.70	19.26	14.76	32.13	50.87	9.57	10.35	—	36.93	—	10.43	7.17	18.9	1511034	
	800	1021363	3384	13.46	9.06	32.28	21.10	21.81	17.32	35.59	57.56	10.71	11.81	—	42.44	—	12.09	8.35	21.3	1511037	
	1000	1021381	4988	15.91	10.63	33.46	24.02	25.20	19.69	43.94	62.36	13.31	12.60	—	46.73	—	13.74	9.17	25.3	1511021	
1250	1021390	6802	17.40	11.81	36.54	26.57	27.87	22.44	49.57	68.86	14.61	13.94	—	52.05	—	15.20	9.80	27.9	1511027		
1550	1021399	8382	18.50	12.60	39.76	28.35	29.72	24.21	51.73	74.45	15.63	14.86	—	56.18	—	16.26	11.42	29.8	1511028		
2000	1021408	11868	20.47	15.16	44.88	30.31	31.89	26.77	55.59	83.46	16.97	15.94	—	62.87	—	17.60	12.70	32.1	1511029		

5:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit on 7 through 300 metric tons (except for 125 metric tons which is proof tested to 1.6 times the Working Load Limit). Maximum customer Proof Load is 1.5 times the Working Load Limit on 400 through 2000 metric tons (available on customer request at time of order 2x WLL).

Load Rated

TA
TYPE APPROVED

Q&T
QUINCY & TOWERS

APPLICATION AND WARNING INFORMATION
SEE CROSBY CATALOG

G-2160E Wide Body Shackles (Metric)

Working Load Limit (t)	Stock No.	Weight Each (kg)	Dimensions (mm)													Effective Body Diameter
			A	B	C	D	E	F	G	H	J	M	N	P	R	
75	1021500	49.9	105	70	293	127	185	136	321	474	95	382	46	70	61	160
125	1021509	86.2	130	80	365	150	220	165	393	584	95	450	46	89	79	173
200	1021518	185	150	105	480	217	275	214	515	773	133	491	46	125	86	241
300	1021527	357	187	133	600	264	321	267	608	953	156	574	46	147	109	290
400	1021337	524	220	160	620	360	375	314	666	1062	183	770	-	205	150	362
500	1021346	779	250	180	685	435	455	340	792	1190	222	835	-	245	164	439
600	1021355	979	275	200	740	475	489	375	816	1292	243	938	-	265	182	480

Working Load Limit (t)	Stock No.	Replacement Bolt Stock No.	Replacement EZ-LOC Collar Stock No.
75	1021500	1089705	1025800
125	1021509	1089714	1025819
200	1021518	1089723	1025828
300	1021527	1089732	1025837
400	1021337	1511039	1025855
500	1021346	1511040	1025864
600	1021355	1511041	1025864

G-2160E Wide Body Shackles (Imperial)

Working Load Limit (t)	Stock No.	Weight Each (lb)	Dimensions (in)													Effective Body Diameter
			A	B	C	D	E	F	G	H	J	M	N	P	R	
75	1021500	110	4.13	2.75	11.54	5.00	7.28	5.34	12.64	18.66	3.75	15.04	1.8	2.75	2.39	6.30
125	1021509	190	5.12	3.15	14.37	5.91	8.66	6.50	15.47	23.00	3.75	17.70	1.8	3.50	3.10	6.80
200	1021518	408	5.91	4.12	18.91	8.56	10.84	8.41	20.27	30.44	5.25	19.35	1.8	4.94	3.39	9.50
300	1021527	787	7.38	5.25	23.63	10.38	12.62	10.50	23.93	37.51	6.13	22.61	1.8	5.78	4.30	11.40
400	1021337	1156	8.66	6.30	24.41	14.17	14.76	12.36	26.22	41.81	7.20	30.31	-	8.07	5.91	14.27
500	1021346	1718	9.84	7.09	26.97	17.13	17.90	13.39	31.19	46.85	8.74	32.87	-	9.65	6.46	17.29
600	1021355	2159	10.83	7.87	29.13	18.70	19.26	14.76	32.13	50.87	9.57	36.93	-	10.43	7.17	18.91

Working Load Limit (t)	Stock No.	Replacement Bolt Stock No.	Replacement EZ-LOC Collar Stock No.
75	1021500	1089705	1025800
125	1021509	1089714	1025819
200	1021518	1089723	1025828
300	1021527	1089732	1025837
400	1021337	1511039	1025855
500	1021346	1511040	1025864
600	1021355	1511041	1025864

5:1 Design Factor. Maximum Proof Load is 2 times the Working Load Limit on 75 through 300 metric tons (except for 125 metric tons which is proof tested to 1.6 times the Working Load Limit). Maximum customer Proof Load is 1.5 times the Working Load Limit on 400 through 600 metric tons (available on customer request at time of order 2xWLL).

Load Rated

TA
TYPE APPROVED

QT
QUALITY & TOLERANCE

APPLICATION AND WARNING INFORMATION
SEE CROSBY CATALOG

 **KITO CROSBY™**

kitocrosby.com/widebody

