


| REV | DESCRIPTION   | BY      | DATE        | CN    |
|-----|---|---------|-------------|-------|
| A   | RELEASE TO PRODUCTION   | REBEALL | 17-JUN-2022 | 33990 |
| B   | UPDATE PL STATEMENT NOTE 3<br>ADD COATS TO NOTE 5<br>BOW & BOLT MODEL UPDATE  | J.LEWIS | 14-DEC-2022 | 34308 |
| C   | BOW, SPLIT PIN, AND BOLT<br>MODEL UPDATE                                      | J.LEWIS | 08-AUG-2023 | 34541 |
| D   | ADD REPLACEMENT TABLE; UPDATE<br>FORMAT; UPDATE MODEL; ADD (VL)<br>ADD NOTE 6 | J.LEWIS | 20-FEB-2024 | 34715 |
| E   | UPDATE PROOF TEST NOTES;<br>UPDATE (VL) LOCATIONS                             | J.LEWIS | 29-JUL-2024 | 35106 |

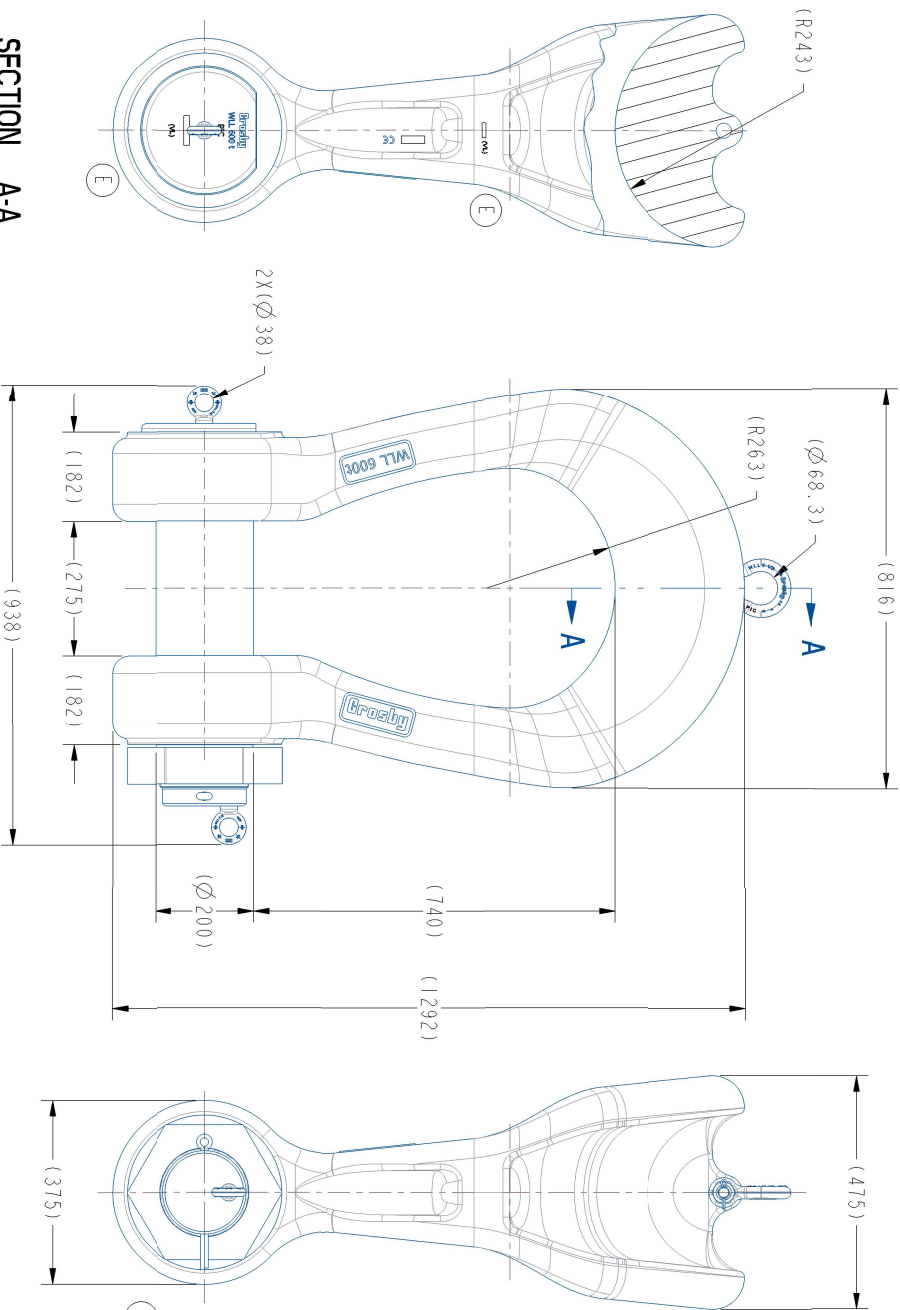

- NOTES:
1. WORKING LOAD LIMIT: 600 METRIC TONS
  2. PROOF TEST LOAD: 1200 METRIC TONS (2XWLL) (MEG ONLY)
  3. CUSTOMER OR THIRD PARTY PROOF LOAD SHALL NOT EXCEED 900 METRIC TONS (1.5XWLL)
  4. TESTING AND DOCUMENTATION PER ITP-2022.0044.
  5. COATING:  
-BOW, NUT: ALKYD-PRIMER RAL 9006, (2-3 COATS)  
-BOLT: ALKYD-PRIMER RAL 3001, (2-3 COATS)
  6. BOW AND BOLT SHALL BE STAMPED "(VL)"; SIZE 10

|               |                          |   |  |  |  |   |  |   |  |
|---------------|--------------------------|---|--|--|--|---|--|---|--|
| SERVICE PARTS |                          | UNLESS OTHERWISE SPECIFIED:<br>ALL DIMENSIONS ARE IN millimeters.<br>DIMENSIONS ARE BEFORE COATING<br>BREAK ALL SHARP EDGES.<br>MACHINE SURFACES. |  | COATING:<br>SEE NOTES<br>MATERIAL:<br>N/A  |  | STATUS:<br>PRODUCTION<br>PROPOSAL:<br>N/A |  | Corporate Headquarters<br>2690 North Central Expressway<br>Woodbridge, NJ 07095<br>1.800.772.1900 |  |
| PN            | DESCRIPTION              | METRIC<br>TOLERANCES:<br>LINEAR<br>ANGLE  |  | HEAT TREATMENT:<br>N/A   |  | HARDNESS:<br>N/A                          |  | TITLE:<br>SHACKLE WIDE BODY G-2160<br>ASSEMBLY 600 TONNE  |  |
| 1511034       | 600T 2160 BLT KIT        | THIRD ANGLE PROJ<br>DO NOT<br>SCALE   |  | REFERENCE:<br>DNVGL-ST-0378; ITP-2022.0044; RAL 9006; RAL 3001   |  | DATE:<br>17-JUN-2022                      |  | APPROX WEIGHT:<br>1002.34 kg  |  |
| 1019551       | SHK ANCH GL 8-1/2+ G2130 | INTERPRET DIMENSIONS AND<br>TOLERANCES PER ASME Y14.5-2009  |  | DISCLOSURE OF THIS DOCUMENT IS NOT PERMITTED UNLESS AUTHORIZATION<br>IS EXPRESSLY GRANTED IN WRITING BY THE CROSBY GROUP LLC |  | ENGINEER:<br>J.LEWIS                      |  | PART NO:<br>1021354   |  |
| 1045995       | BLT EYE MACH M-20        |   |  |  |  | PRODUCT LINE:<br>2160                     |  | DRAWING NO:<br>1021354  |  |
| 3702605       | ISO SPLIT PIN 16MMX250MM |   |  |  |  | SCALE:<br>1:10                            |  | SHEET<br>1 OF 1   |  |