


SERVICE PARTS	
PN	DESCRIPTION
1511021	1000+ 2160 BLT KIT
1019551	SHK BLT-T ANCH GL 8.50 TM 62130
1045995	BLT EYE MACH M-20
3707984	LOCK PIN 16X375

REV	ZONE	DESCRIPTION	BY	DATE	CM
A	N/A	RELEASE TO PRODUCTION	J LEWIS	16-JAN-2024	34215
B	A4.84	UPDATE PL NOTES; UPDATE (VU) LOCATIONS	J LEWIS	29-JUL-2024	35106

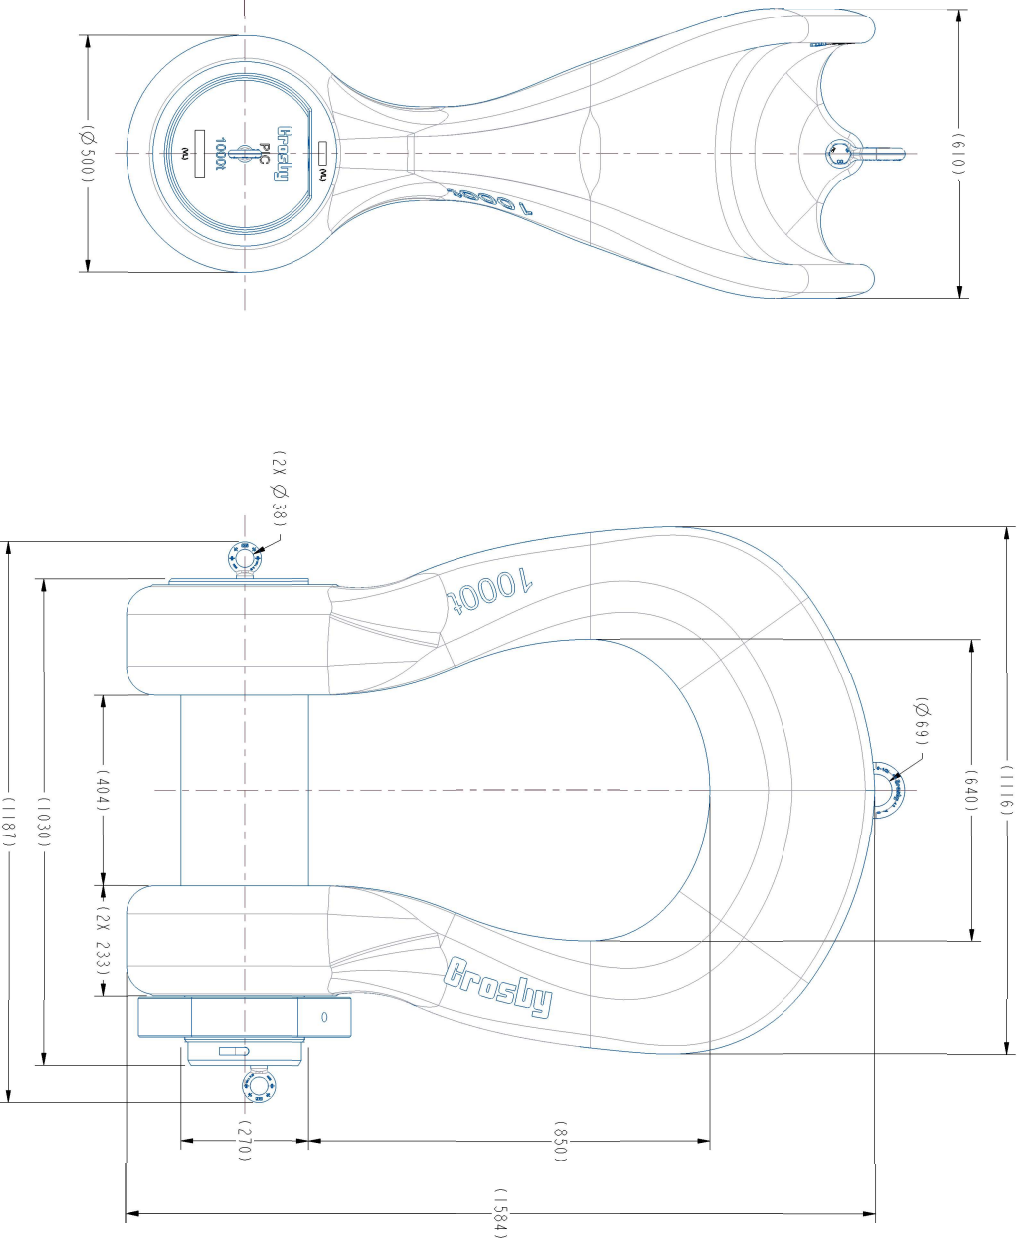

- NOTES:
1. WORKING LOAD LIMIT: 1000 METRIC TONS @ 5:1 DESIGN FACTOR.
  2. PROOF TEST LOAD: 1500 METRIC TONS (1.5MILL)
  3. MFG MAX PROOF LOAD: 2000 METRIC TONS. (2MILL)
  4. -AVAILABLE ON CUSTOMER REQUEST AT TIME OF ORDER
  5. TESTING AND DOCUMENTATION PER ITP-2022.0044.
  6. COATING:
  - BOW: NUT: ALKYO-PRIMER RAL 9006, (2-3 COATS)
  - BOLT: ALKYO-PRIMER RAL 3001, (2-3 COATS)
  6. BOTH BOW AND BOLT SHALL BE STAMPED "VLT", USE 10 SIZE STAMP

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN millimeters. DIMENSIONS ARE BEFORE COATING. BREAK ALL SHARP EDGES.				COATING: SEE NOTES		STATUS: PRODUCTION		<div>Crosby</div> <div>CORPORATE HEADQUARTERS 2800 NORTH CENTRAL EXPRESSWAY RICHARDSON, TX 75080 WWW.THECROSBYGROUP.COM 1.800.772.1500</div>					
MACHINE SURFACES: $\nabla$				MATERIAL: N/A		DRAWN BY: JLEWIS							
TOLERANCES: LINEAR $\pm .25$				HEAT TREATMENT: N/A		DATE: 16-Jan-2024							
THIRD ANGLE PROJ				HARDNESS: N/A		ENGINEER: JLEWIS							
DO NOT SCALE		ANGLE $\pm 0.5^\circ$		REFERENCE: DNVGL-ST-0378; ITP-2022-0044; RAL 9006; RAL 3001				PRODUCT LINE: 2160		SCALE: 1:8			
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009				DISCLOSURE OF THIS DOCUMENT IS NOT PERMITTED UNLESS AUTHORIZATION IS EXPRESSLY GRANTED IN WRITING BY THE CROSBY GROUP LLC				SUPERSEDES: N/A		DRAWING NO: 1021381		SHEET 1 OF 1	