
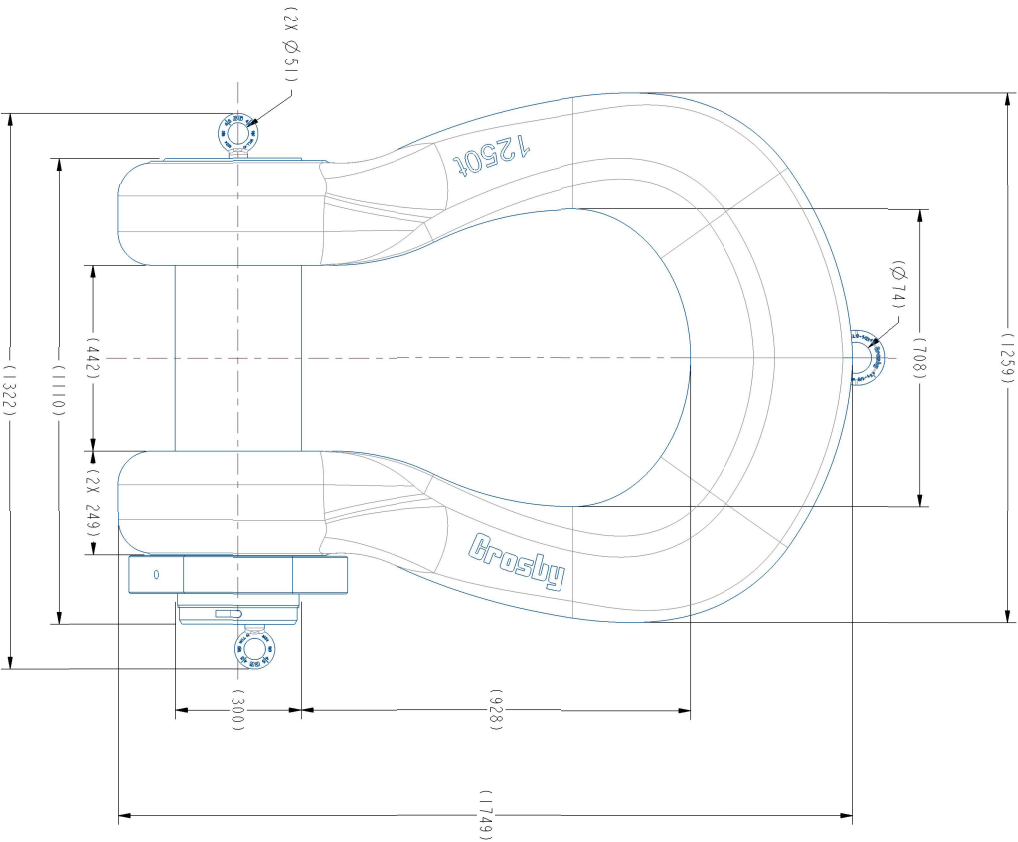


SERVICE PARTS	
PN	DESCRIPTION
1511027	1250t 2160 BLT KIT
1019579	SHK BLT-T ANCH GL 9.50 TN G2130
1046029	BLT EYE MACH M-24
3707987	LOCK PIN 16X40

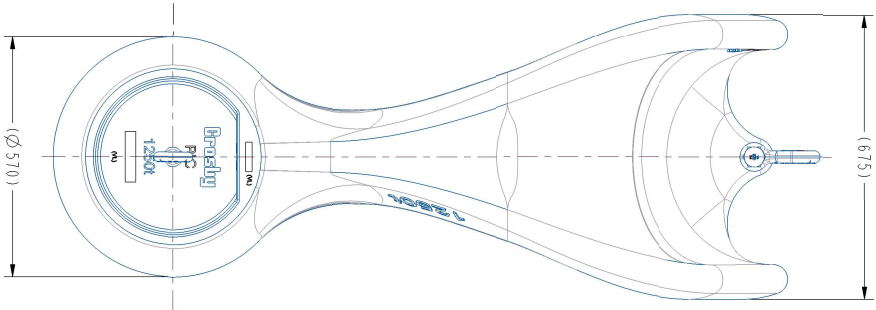

- NOTES:
- WORKING LOAD LIMIT: 1250 METRIC TONS @ 5:1 DESIGN FACTOR.
 - PROOF TEST LOAD: 1875 METRIC TONS (1.5WLL)
 - MFG MAX PROOF LOAD: 2500 METRIC TONS. (1.2WLL)
 - AVAILABLE ON CUSTOMER REQUEST AT TIME OF ORDER
 - TESTING AND DOCUMENTATION PER ITP-2022-0044.
 - COATING:
 - BOW: NOT: ALKTD-PRIMER RAL 9006. (2-3 COATS)
 - BOLT: ALKTD-PRIMER RAL 3001. (2-3 COATS)
 - BOTH BOW AND BOLT SHALL BE STAMPED "VL", USE 10 SIZE STAMP

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN millimeters. DIMENSIONS ARE BEFORE COATING. BREAK ALL SHARP EDGES. MACHINE SURFACES: ∇		COATING: SEE NOTES MATERIAL: N/A HEAT TREATMENT: N/A HARDNESS: N/A DISCLOSURE OF THIS DOCUMENT IS NOT PERMITTED UNLESS AUTHORIZATION IS EXPRESSLY GRANTED IN WRITING BY THE CROSBY GROUP LLC		STATUS: PRODUCTION PROPOSAL: N/A DRAWN BY: JLEWIS DATE: 17-Jan-2024 ENGINEER: JLEWIS PRODUCT LINE: 2160 SUPERSEDES: N/A		TITLE: SHACKLE WIDE BODY G-2160 ASSEMBLY 1250 TONNE CORPORATE HEADQUARTERS 2800 NORTH CENTRAL EXPRESSWAY RICHARDSON, TX 75080 WWW.ITECROSBYGROUP.COM 1/20/17/21/200	
DO NOT SCALE	ANGULAR $\pm 0.5^\circ$	LINEAR $\pm .25$	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5-2009	HEAT TREATMENT: N/A	DISCLOSURE OF THIS DOCUMENT IS NOT PERMITTED UNLESS AUTHORIZATION IS EXPRESSLY GRANTED IN WRITING BY THE CROSBY GROUP LLC	SCALE: 1:9	DRWING NO: 1021390

REV	ZONE	DESCRIPTION	BY	DATE	CM
A	N/A	RELEASE TO PRODUCTION	J LEWIS	17-JAN-2024	34215
B	A4-B4	UPDATE PROOF-TEST NOTES, UPDATE (VL) LOCATIONS	J LEWIS	29-JUL-2024	35108